

8-Gallon Base-Mount

Single or Two Stage
Gasoline

Compressor Pump:

- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

Generator:

- Brushless alternator
- Total harmonic distortion (THD) less than 5%
- 100% copper windings
- Comes standard with (2) 120V, 15A and (1) 240V, 20A receptacles (Two-stage models)

Frame:

- Powder coated 8-gallon twin tank receivers (Portable and stationary models)
- 3/16-inch base plate to reduce vibration
- 16-gauge powder coated two-piece belt guard
- Flat-free tires (Portable models)

Components:

- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 12 or 16 1/2-inch fly wheel
- Quality pilot valve unloader

The 8-gallon air compressor/generator will run your air and electric tools from one convenient machine. In times of power failure use the generator as a backup power source.



AG2-SH13-B shown with electric start option, AX-0019

| PORTABLE | | ALTERNATOR WATTAGE | | | | | RECEPTACLES | DISPLACEMENT/ ENGINE | COMPRESSOR | DIMENSIONS (LxWxH) | SHIP WT. | NET WT. |
|---------------|-----------------|--------------------|----------------|-----------------------------|------------------------------|------------------------------------|------------------|-------------------------|-----------------|-----------------------|----------|---------|
| MODEL NUMBER | CFM @ 90 PSI | CFM @ PSI | MAX. OUTPUT | CONT. WITH COMP. ON-LOAD | CONT. WITH COMP. OFF-LOAD | | | | | | | |
| AG1-PH65-08M1 | 12.4 | 10.9 @ 125 | 1800 watts | 600 watts | 1600 watts | (2) NEMA 5-15R | 196cc Honda OHV | Single stage, cast iron | 44.5x26x27.5in. | 257 lb. | 207 lb. | |
| AG1-PR07-08M1 | 12.4 | 10.9 @ 125 | 1800 watts | 600 watts | 1600 watts | (2) NEMA 5-15R | 211cc Subaru OHC | Single stage, cast iron | 44.5x26x27.5in. | 257 lb. | 207 lb. | |
| AG2-PH13-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 389cc Honda OHV | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |
| AG2-PK14-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 429cc Kohler OHV | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |
| AG2-PM14-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 420cc Mi-T-M OHV | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |
| AG2-PS14-08M1 | 16.4 | 15.7 @ 175* | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 404cc Subaru OHC | Two stage, cast iron | 52x28x34in. | 450 lb. | 375 lb. | |

| STATIONARY | | ALTERNATOR WATTAGE | | | | | RECEPTACLES | DISPLACEMENT/ ENGINE | COMPRESSOR | DIMENSIONS (LxWxH) | SHIP WT. | NET WT. |
|---------------|-----------------|--------------------|----------------|-----------------------------|------------------------------|---------------------------------|------------------|-------------------------|-------------|-----------------------|----------|---------|
| MODEL NUMBER | CFM @ 90 PSI | CFM @ 175 PSI* | MAX. OUTPUT | CONT. WITH COMP. ON-LOAD | CONT. WITH COMP. OFF-LOAD | | | | | | | |
| AG2-SH13-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 389cc Honda OHV | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |
| AG2-SK14-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 429cc Kohler OHV | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |
| AG2-SM14-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 420cc Mi-T-M OHV | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |
| AG2-SS14-08M1 | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 404cc Subaru OHC | Two stage, cast iron | 44x22x34in. | 465 lb. | 365 lb. | |

| BASE-MOUNT | | ALTERNATOR WATTAGE | | | | | RECEPTACLES | DISPLACEMENT/ ENGINE | COMPRESSOR | DIMENSIONS (LxWxH) | SHIP WT. | NET WT. |
|--------------|-----------------|--------------------|----------------|-----------------------------|------------------------------|---------------------------------|------------------|-------------------------|-------------|-----------------------|----------|---------|
| MODEL NUMBER | CFM @ 90 PSI | CFM @ 175 PSI* | MAX. OUTPUT | CONT. WITH COMP. ON-LOAD | CONT. WITH COMP. OFF-LOAD | | | | | | | |
| AG2-SH13-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 389cc Honda OHV | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |
| AG2-SK14-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 429cc Kohler OHV | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |
| AG2-SM14-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 420cc Mi-T-M OHV | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |
| AG2-SS14-B | 16.4 | 15.7 | 4000 watts | 2300 watts | 3500 watts | (2) NEMA 5-15R, (1) NEMA L6-20R | 404cc Subaru OHC | Two stage, cast iron | 47x22x28in. | 390 lb. | 325 lb. | |

*Equipped with 150-PSI maximum rated regulator.

Limited Warranties:

- 1 year Mi-T-M engine
- 2 year alternator
- 2 year pump exchange
(see page 65 for information)
- 3 year Honda & Kohler engines
- 5 year Subaru engine




NEMA 5-15R,
125V



NEMA L6-20R,
240V

To see more online, scan here
or go to www.mitm.com

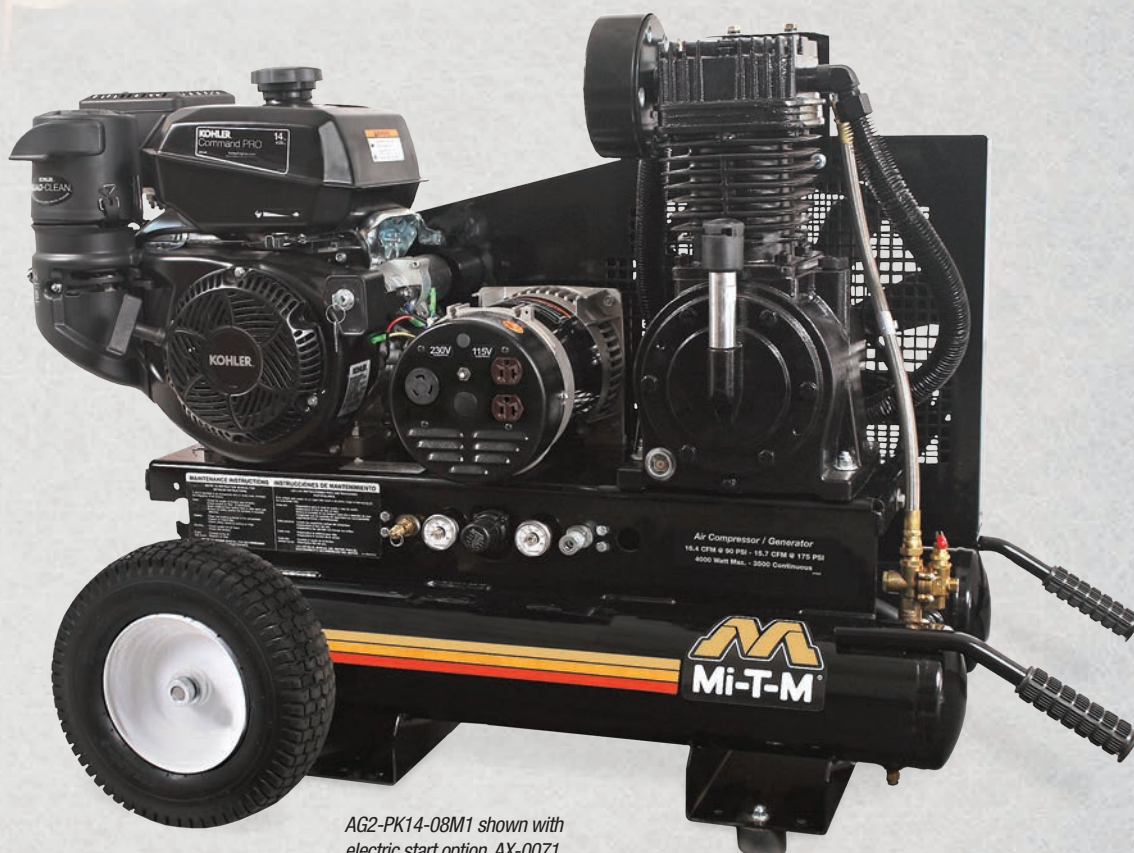

AG2-PK14-08M1 shown with
electric start option, AX-0071

Accessories & Options:

| PART NUMBER | DESCRIPTION | FITS MODELS | PART NUMBER | DESCRIPTION | FITS MODELS |
|--------------|---|---|-------------|--|-------------------------|
| 70-0357 | Engine oil drain extension | AG1-PH65-08M1 | AX-0067 | Electric start - battery box and cables not included | AG1-PR07-08M1 |
| 70-0358 | Engine oil drain extension | Two stage Honda, Kohler & Mi-T-M models | AX-0068 | Idle down - includes electric start - battery not included | Two stage Honda models |
| 70-0380 | Engine oil drain extension | Subaru models | AX-0069 | Idle down - includes electric start - battery not included | Two stage Subaru models |
| 854-0093 | Service truck mount kit - recommended for models that are mounted in service truck applications | Two stage portable & stationary models | AX-0071 | Electric start - battery, box and cables not included | Kohler models |
| AW-6000-1002 | Equipment cover | All models | AX-0072* | Electric start - battery box and cables included, battery not included | Kohler models |
| AX-0019 | Electric start - battery, box and cables not included | Two stage Honda models | AX-0073 | Electric start - battery, box and cables not included | Mi-T-M models |
| AX-0028 | Lifting hook | Two stage portable & stationary models | AX-0074* | Electric start - battery box and cables included, battery not included | Mi-T-M models |
| AX-0062 | Electric start - battery, box and cables not included | Two stage Subaru models | AX-0075 | Idle down - includes electric start - battery not included | Mi-T-M models |
| AX-0063 | Lifting hook | Base-mount models | IX-0055 | Remote start/choke; 6-ft. wire extension for key switch; you will also need to order AX-0019 | Two stage Honda models |
| AX-0064* | Electric start - battery box and cables included, battery not included | Two stage Honda models | | | |
| AX-0065* | Electric start - battery box and cables included, battery not included | Two stage Subaru models | | | |

**Note: Option cannot be mounted at the factory but can be shipped with the unit for custom mounting. Consult factory for more information.*